



- Single / Dual / Triple Outputs
- Universal 90 to 264VAC Input
- 3.3VDC to 24VDC Outputs
- 4,000VAC Input to Output Isolation
- PCB and Chassis Mount Packages
- Full Safety Approvals



Model Number	Output Voltage	Output Amps	Output Watts
SINGLE OUTPUT - PCB Mount			
MSMA-0300	3.3 VDC	7.5	25W
MSMA-0301	5 VDC	6	30W
MSMA-0302	12 VDC	2.5	30W
MSMA-0303	15 VDC	2	30W
MSMA-0305	24 VDC	1.25	30W
SINGLE OUTPUT - Chassis Mount			
MSMC-0300	3.3 VDC	7.5	25W
MSMC-0301	5 VDC	6	30W
MSMC-0302	12 VDC	2.5	30W
MSMC-0303	15 VDC	2	30W
MSMC-0305	24 VDC	1.25	30W
SINGLE OUTPUT - DIN Rail Mount			
MSMC-0300/DRL	3.3 VDC	7.5	25W
MSMC-0301/DRL	5 VDC	6	30W
MSMC-0302/DRL	12 VDC	2.5	30W
MSMC-0303/DRL	15 VDC	2	30W
MSMC-0305/DRL	24 VDC	1.25	30W

Fully Approved
 UL/CSA22.2 60601-1 File# E167432
 EN60601 File# B021022749041
 IEC60601-1 File# DE353936



- Single / Dual / Triple Outputs
- Universal 90 to 264VAC Input
- 3.3VDC to 24VDC Outputs
- 4,000VAC Input to Output Isolation
- PCB and Chassis Mount Packages
- Full Safety Approvals



Model Number	Output Voltage	Output Amps	Output Watts
DUAL OUTPUT - PCB Mount			
MDMA-0306	+/-12 VDC	+/-1.25	30W
MDMA-0307	+/-15 VDC	+/-1	30W
MDMA-0308	+5/12 VDC	3/1.25	30W
DUAL OUTPUT - Chassis Mount			
MDMC-0306	+/-12 VDC	+/-1.25	30W
MDMC-0307	+/-15 VDC	+/-1	30W
MDMC-0308	+5/12 VDC	3/1.25	30W
DUAL OUTPUT - DIN Rail Mount			
MDMC-0306/DRL	+/-12 VDC	+/-1.25	30W
MDMC-0307/DRL	+/-15 VDC	+/-1	30W
MDMC-0308/DRL	+5/12 VDC	3/1.25	30W
TRIPLE OUTPUT - PCB Mount			
MTMA-0309	+5,+/-12 VDC	3,0.63/0.63	30W
MTMA-0311	+5,+/-15 VDC	3,0.5/0.5	30W
TRIPLE OUTPUT - Chassis Mount			
MTMC-0309	+5,+/-12 VDC	3,0.63/0.63	30W
MTMC-0311	+5,+/-15 VDC	3,0.5/0.5	30W
TRIPLE OUTPUT - DIN Rail Mount			
MTMC-0309/DRL	+5,+/-12 VDC	3,0.63/0.63	30W
MTMC-0311/DRL	+5,+/-15 VDC	3,0.5/0.5	30W

Fully Approved
 UL/CSA22.2 60601-1 File# E167432
 EN60601 File# B021022749041
 IEC60601-1 File# DE353936



30W Medical Grade Ultraminiature Switching Power Supplies

MMA-30 series

INPUT SPECIFICATIONS

Input Voltage	90-264VAC; Nominal: 100-240VAC
Input Frequency	47-440 Hz, Nominal: 50-60Hz
Inrush Current (100V / 200V)	20A / 40A, typ
Leakage Current	<500UA @ 264VAC, 50Hz

OUTPUT SPECIFICATIONS

Output Voltage/Current	See Specific Model
Initial Accuracy	+/-1%, adjustable
Voltage Adjust	+/-6%, typ
Load Regulation	+/-0.3%, typ
Line Regulation	+/-0.3%, typ
Temperature Coefficient	+/-0.03%/°C
Ripple/Noise(20Mhz BW)	150mV Pk-Pk, typ
Overvoltage Protection	Clamp, 130-150% *
Hold Up Time	30mS, typ
Short Circuit Protection	Continuous, self-recovering *
Current Limit	130% typ, Self-Reset Foldback

GENERAL SPECIFICATIONS

On/Off Control	Open Collector
	Logic "1"/Open=ON
	Logic "0"/GND=OFF
Input-Out Isolation	4000VAC
Output-Ground Isolation	1000VAC
Input-Ground Isolation	2500VAC
Operating Frequency	140 Khz, fixed
Efficiency (@ Full Load)	75 - 80%, typ

ENVIRONMENTAL SPECIFICATIONS

Oper. Temperature	0 to +50°C FL See Derate * (Free-air Convection)
Relative Humidity	0-95%, Non-Condensing
Storage Temperature	-25 to +71°C *
MTBF, Single/Multi Output	180,000 Hrs/110,000 Hrs
	Mil Std 217, 25C

All specifications are typical at nominal input, full load, and 25DegC unless otherwise noted



* These are stress ratings. Exposure of the devices to any of these conditions may adversely affect long term reliability. Proper operation under conditions other than the standard operating conditions is neither warranted nor implied.

WWW.ASTRODYNE.COM

PHYSICAL SPECIFICATIONS

Case Material	Rynite, 94V-0 Rated	
Construction	Encapsulated, Soft Pot	
Size	PCB Mount	Single O/P: 3.5" x 2.5" x 0.98"
		Multi O/P: 4.06" x 2.5" x 0.98"
Chassis Mount		Single O/P: 4.76" x 2.56" x 1.0"
		Multi O/P: 5.34" x 2.56" x 1.0"
Weight	PCB / CHASSIS	
	Singles	10.4 oz (292g) / 13.4 oz (376g)
	Duals/Triples	12.1 oz (340g) / 15.4 oz (430g)


PERFORMANCE CURVES

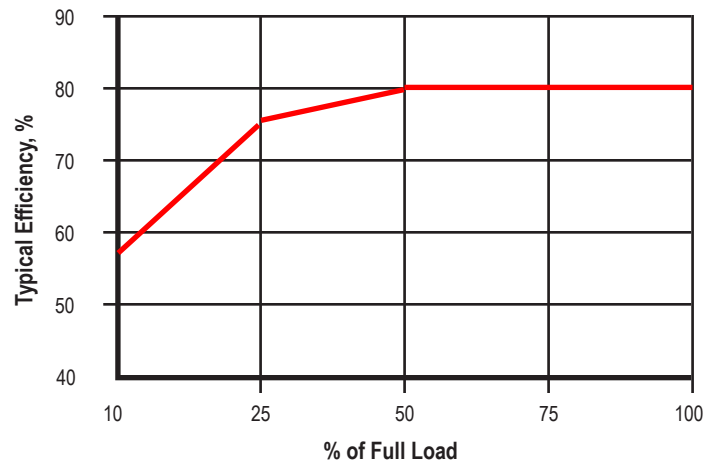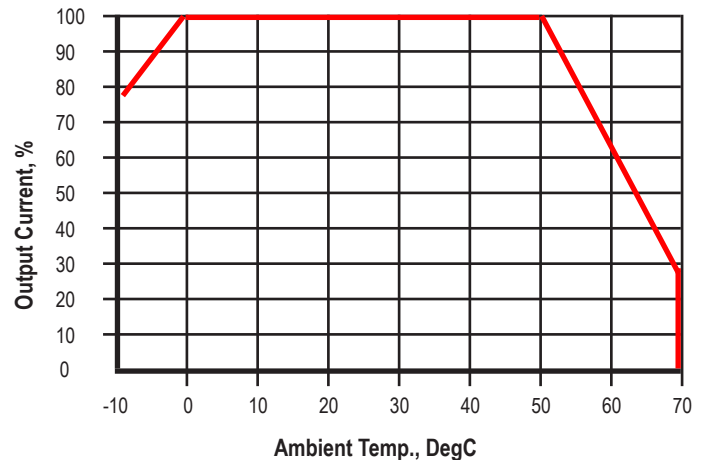


Astrodyne products are not authorized or warranted for use as critical components in life support systems, equipment used in hazardous environments, nuclear controls systems, or other mission-critical applications.

ASTRODYNE USA: 1-800-823-8082
ASTRODYNE PACIFIC: 886-2-26983458


MECHANICAL DIMENSIONS - PCB MOUNT

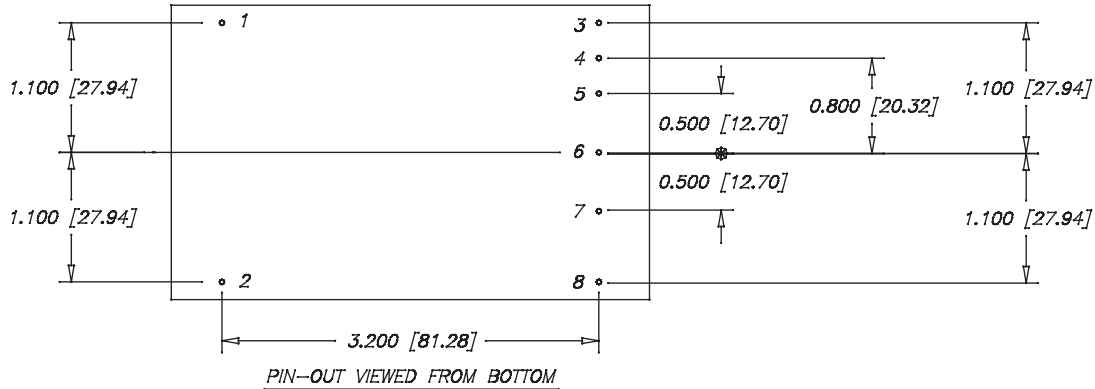

SINGLE OUTPUT

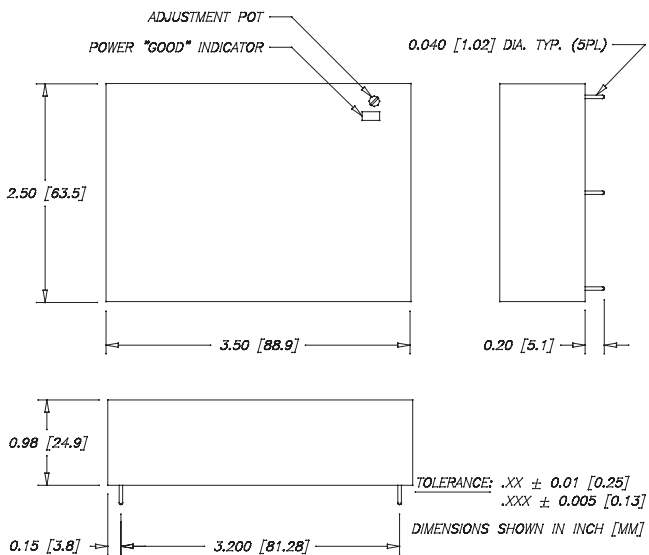


DUAL/TRIPLE OUTPUT

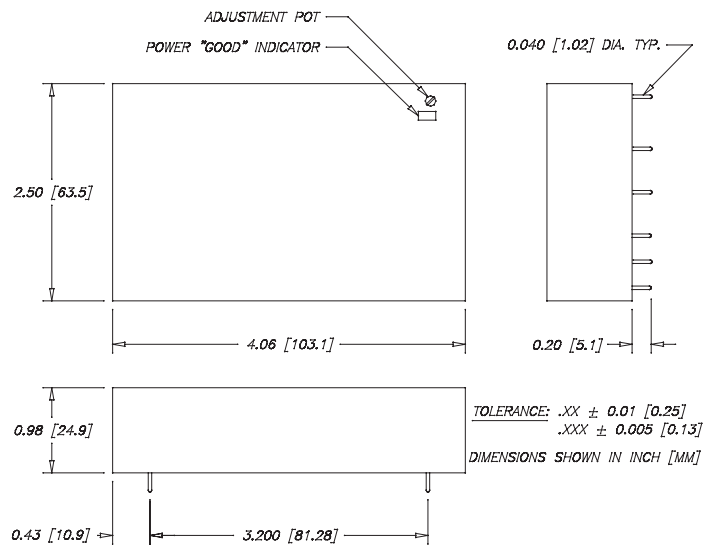


Model Type / Pin#	Single	Dual Matched	Dual 5/12V	Triple
1	AC HI	AC HI	AC HI	AC HI
2	AC LO	AC LO	AC LO	AC LO
3	Ctrl	-Vout	Com	-Vout
4	No Pin	Ctrl	Ctrl	Ctrl
5	No Pin	No Pin	No Pin	+5 Ret
6	-Vout	Com	+5out	+/-Com
7	No Pin	No Pin	No Pin	+5Vout
8	+Vout	+Vout	+12Vout	+Vout

MECHANICAL DIMENSIONS - CHASSIS MOUNT

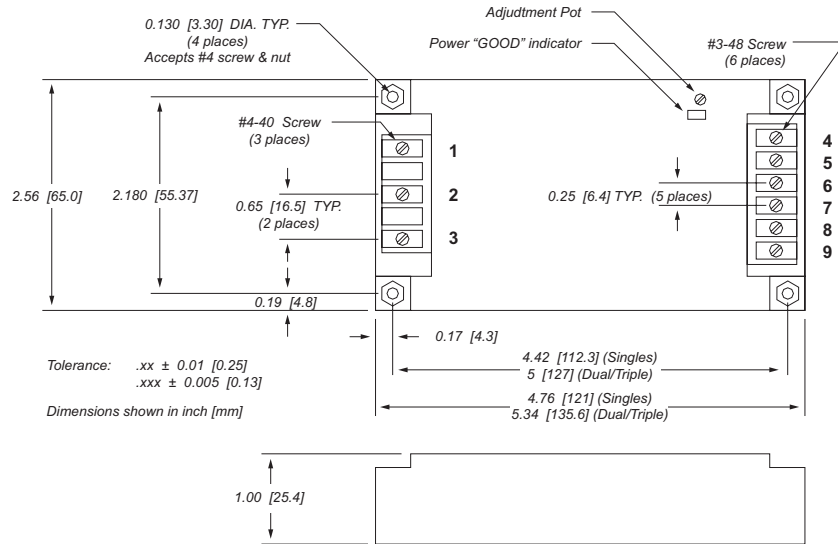

MECHANICAL DIMENSIONS - DIN RAIL

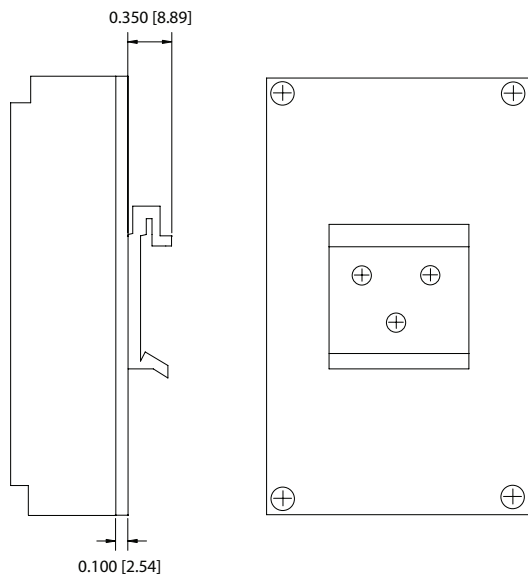

Model Type / Pin#	Single	Match Dual	Unmatch Dual	Triple
1	AC LO	AC LO	AC LO	AC LO
2	GND	GND	GND	GND
3	AC HI	AC HI	AC HI	AC HI
4	+Vout	+Vout	+12Vout	+Vout
5	+Vout	Com	+5Vout	+5Vout
6	-Vout	Com	+5Vout	+/- Com
7	-Vout	-Vout	Com	+5V Ret
8	N/C	N/C	Com	-Vout
9	Ctrl	Ctrl	Ctrl	Ctrl

DIN Rail mounting kit available for Chassis-mount modules.
 - For 30 watt single outputs specify part # M-DRL-30S
 - For 30 watt dual/single outputs specify part # M-DRL-30T
 Kit includes mounting plate, DIN Rail cliip and assembly hardware.